



G-G

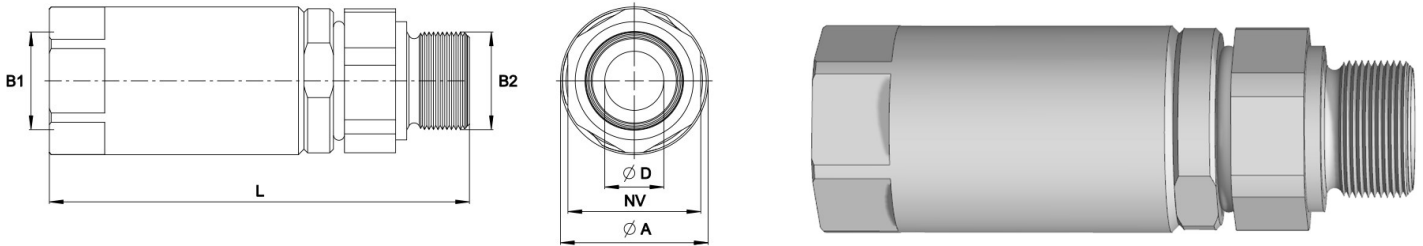

FEMALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV	Max work pressure	Max peak pressure	Seal kit
5001285	G 1/2	G 1/2	98 mm	35 mm	12 mm	32 mm	35 MPa	52.5 MPa	5001632
5001291	G 3/4	G 3/4	110 mm	40 mm	16 mm	36 mm	35 MPa	52.5 MPa	5001633
5001294	G 1	G 1	117 mm	50 mm	20 mm	46 mm	35 MPa	52.5 MPa	5001634
5001589	G 1 1/2	G 1 1/2	132 mm	65 mm	30 mm	60 mm	30 MPa	45 MPa	5001636
5001590	G 1 1/4	G 1 1/4	122 mm	55 mm	25 mm	50 mm	32 MPa	48 MPa	5001635
5001594	G 3/8	G 3/8	92 mm	35 mm	8 mm	32 mm	36.5 MPa	55 MPa	5001631
5001597	G 1/4	G 1/4	85 mm	35 mm	6 mm	32 mm	40 MPa	60 MPa	5001630
9010000	G 1/2	G 1/2	92 mm	37 mm	12 mm		35 MPa		6002515
9010001	G 3/4	G 3/4	109 mm	43 mm	16 mm		35 MPa		6002516
9010002	G 1	G 1	117 mm	50 mm	20 mm		35 MPa		6002517

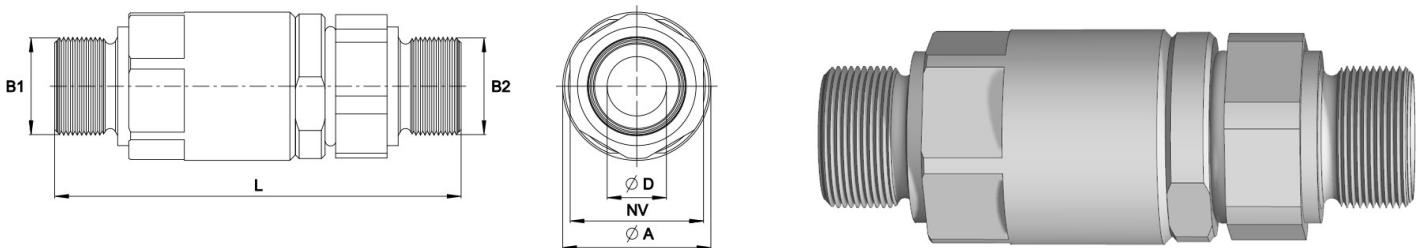

MALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV	Max work pressure	Max peak pressure	Seal kit
5001275	G 3/4	G 3/4	106 mm	40 mm	16 mm	36 mm	35 MPa	52.5 MPa	5001633
5001280	G 1/2	G 1/2	98 mm	35 mm	12 mm	32 mm	35 MPa	52.5 MPa	5001637

G = BSP, 60° cone

Temperature range (standard) = -30° C - +100° C

For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com